

PW470

Circular Chart Recorder



FEATURES

- 0-100 PSI
- 7-Day or 24-Hour recording
- 1/4" NPT fitting
- Compact and durable design
- Single AA battery operation

ABOUT

Our 4-inch (101mm) line of recorders produce a permanent visual record of your variable pressure data. These recorders provide a complete written history at the source.



For more information, please refer to

T: +31 (0)174 287 160


E: info@vrsupplies.com

W: www.vrsupplies.com

Circular Chart Recorder

Specifications

- **Ambient Operating RH Conditions:** 0-95% RH non-condensing
- **Ambient Operating Temperature Conditions:** -22 to 122F (-30 to 50C)
- **Battery Life (Avg):** 1 Year
- **Calibration Options:** N100, N300
- **Channels: CH1:** Pressure
- **Chart Rotation Speed:** 7 Day or 24 Hour Switchable
- **Dimensions:** 6.25 x 6 x 2.9in
- **Enclosure:** Velox PBT NEMA 4X with Polycarbonate Door Window
(Weather/Water Resistant)
- **Fitting:** 1/4" NPT Thread, 5/8" Hex
- **IP Rating:** 66
- **Included Accessories:** One AA Battery, Red Pen and Quick Start Guide.
*Charts sold separately.
- **Mounting Options:** Stem or Wall Mount (With Keyhole)
- **Power Source:** Battery; One AA Battery (User Replaceable)
- **Pressure Accuracy:** 2% of Full Scale
- **Pressure Range:** 0 to 100PSI
- **Response Time:** 1 Second
- **Unit Weight:** 1.8 lbs
- **Units/Pkg:** 1
- **Warranty:** 12-Month Limited

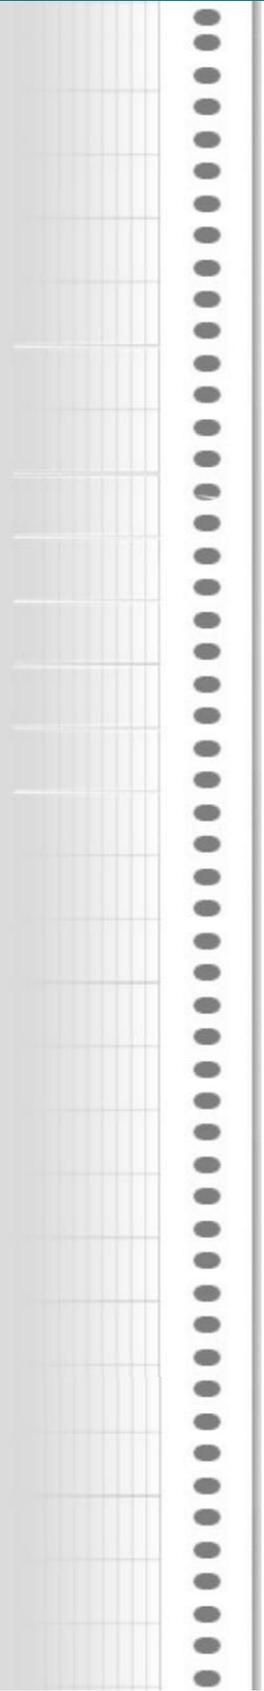

Accessories



A791 – Pressure Kit
Pressure Fitting Accessory Kit



A792 – Pressure Pigtail
Steam Pressure Pigtail



A793 – Hydrant Kit
Fire Hydrant Adapter Kit



R006 – AA Battery



R022 – Pressure Filter Kit
Filtre Kit includes Snubber