


## SL4350

### Circular Chart Recorder

#### FEATURES

- Digital Display
- 7-Day or 24-Hour recording
- C/F Switchable
- 2-3 year battery life
- Temperature Range: -22 to 122F (Should not be placed in temperatures below 0F for extended time)

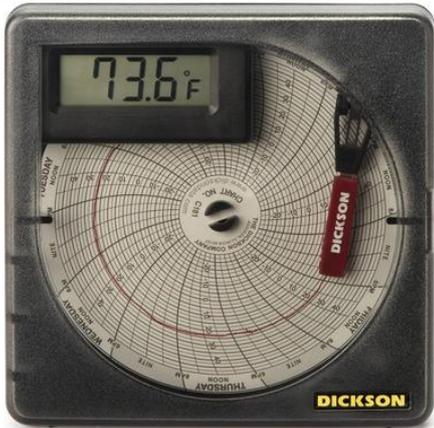

#### ABOUT

A great size coupled with 2-3 year battery life makes this 4-inch (101mm) temperature chart recorder a great temperature data collection tool.



For more information, please refer to

**T:** +31 (0)174 287 160

**E:** [info@vrsupplies.com](mailto:info@vrsupplies.com)

**W:** [www.vrsupplies.com](http://www.vrsupplies.com)

## Specifications

- **Ambient Operating RH Conditions:** 0-95% RH non-condensing
- **Ambient Operating Temperature Conditions:** -22 to 122F (-30 to 50C)
- **Approvals:** CE
- **Battery Life (Avg):** 3 Years
- **Calibration Options:** N100, N300, N400
- **Channels:** CH1: Temperature
- **Chart Rotation Speed:** 24 Hour or 7 Day
- **Dimensions:** 2.4 x 5.2 x 5.2in
- **Display Accuracy:** 1.8F
- **Display Dimensions Height:** 0.36
- **Display Dimensions Width:** 1.8
- **Display Resolution:** 0.1
- **Display Type:** LCD
- **Enclosure:** Black ABS and Polycarbonate
- **IP Rating:** 21
- **Included Accessories:** One AA Battery, Red Pen and Quick Start Guide.  
\*Charts sold separately.
- **Mounting Options:** Free Standing or Wall Mounted
- **Power Source:** Battery; One AA Battery (User Replaceable)
- **Response Time:** 11 Minutes to 63% of Full Scale (in air moving 5' per second)
- **Temperature Accuracy (Recorder Only):**  $\hat{A}\pm 2\%$  Of Full Scale
- **Temperature Range:** -22 to 122F (-30 to 50C)
- **Temperature Sensor:** Precise spiral wound bi-metallic strip transducer
- **Unit Weight:** 3 lbs
- **Units/Pkg:** 1
- **Warranty:** 12-Month Limited

**Accessories**



R006 – AA Battery